



centralised interface

The Ti.Link® centralised interface allows you to cascade up to 12 TiTAKO LIGHT® generators to automated production control systems via the ModBus TCP-IP Ethernet communication network in line with the INDUSTRY 4.0 standard.

Thanks to Plug&Play connection, the generators are recognised and interconnected, as soon as they are connected, also making remote assistance possible.

Ti.Link® is equipped with an HDMI plug for connecting an optional monitor to display all parameters of the Generators connected.

There are also 2 USB ports for connecting a mouse, keyboard or performing any software upgrade.



Power supply:

24V DC / AC

Dimensions WxDxH

150x165x57mm

(with hook-up system for DIN bar)



Industry 4.0



Wi-Fi




Bluetooth



Modbus



Multitasking
Control

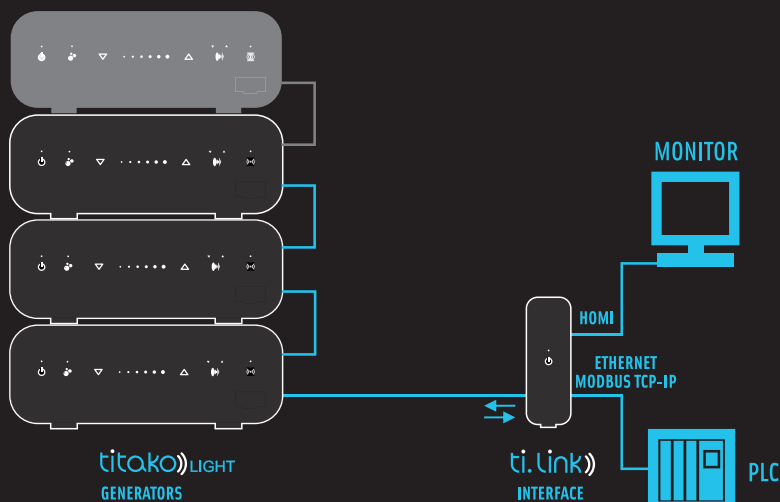

Cascade connection
of multiple TiTAKO LIGHT®
generators through the
centralized Ti.Link® interface



UNITECH s.r.l. Viale del Lavoro, 7
35010 Peraga di Vigonza (PD) Italy
tel. +39 049 628961 - tel/fax +39 049 629258

www.unitech-italia.com
info@unitech-italia.com

In partnership with:



ULTRASONIC RESEARCH & DEVELOPMENT

EVERY WAVE s.r.l.
Sede Legale: Via Germania, 7-int6
Sede Operativa: Viale Del Lavoro, 7
35010 Vigonza (PD) Italy
Tel +39 049 629258 Cell. +39 339 8182549

www.everywave.eu
info@everywave.eu