

titako)) BLACK

TITAKO BLACK® has a unique and very attractive, functional design. The user interface is not present on board, but it is visible and interactive in remote desktop, as part of a local and global network.



The functions envisaged are countless and all customisable:

- Remote assistance
- Wi-Fi connection
- Bluetooth connection
- Self-recognition and autoseup of connected transducers
- Multifrequency Automatic work programs
- Degas Mode
- Pulse Mode
- S.I.A. (Smart Impedance Analyser) control system
- Pulsed cyclic modulation SWEEP + STEP MODE
- Manual timer
- Multilingual Online Help Guide
- Multi-function I/O remote control as standard
- Interconnection and management of Modbus Ethernet TCP-IP via IP address (Standard INDUSTRY 4.0)
- Datalogger
- Online remote user interface
- Software upgrade via USB Key or Remote Assistance
- Low-power operation mode



Remote assistance



Wi-Fi



Bluetooth



USB



Smart Impedance Analyzer



Dual Modulation STEP + SWEEP Mode



Multitasking Control



Industria 4.0

Available with power supply from:

110v → 500v 50/60Hz

both single-phase and three-phase (even without neutral).

Universal Power Supply



Single-frequency
Dual-frequency
Multi-frequency

Frequency range:

20 → 135 KHz




Maximum power:

5000w

Up to 5000w
in ultra-compact dimensions

Dimensions WxDxH

320x275x134mm
(suitable for a 19" rack)

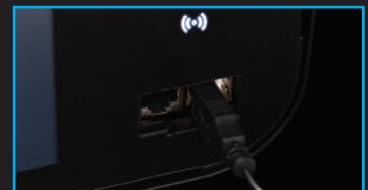

USB Connections

This version is ideal for automatic systems where maximum control of all system parameters is required through remote management.



UNITECH s.r.l. Viale del Lavoro, 7
35010 Peraga di Vigonza (PD) Italy
tel. +39 049 628961 - tel/fax +39 049 629258

www.unitech-italia.com
info@unitech-italia.com

In partnership with:



ULTRASONIC RESEARCH & DEVELOPMENT

EVERY WAVE s.r.l.
Sede Legale: Via Germania, 7-int6
Sede Operativa: Viale Del Lavoro, 7
35010 Vigonza (PD) Italy
Tel +39 049 629258 Cell. +39 339 8182549

www.everywave.eu
info@everywave.eu